

CORESTRIPPER.COM



HYDRAULIC CORE STRIPPERS

(PATENTED DESIGN)



MODEL CS-32 (Shown with Optional Spare Blade)

| | | |
|----------------|---------------------------------|---------------------------------|
| | MODEL CS-18 | MODEL CS-32 |
| Maximum Roll: | 18" Long X 13" Diameter | 32" Long X 16" Diameter |
| Power: | 3 HP, 208/220/440 Volt, 3 Phase | 3 HP, 208/220/440 Volt, 3 Phase |
| Controls: | 24 Volt DC, Dual Palm Buttons | 24 Volt DC, Dual Palm Buttons |
| Cycle Time: | 6.38 Seconds (Dry) | 6.38 Seconds (Dry) |
| Oil Reservoir: | 10 Gallons | 10 Gallons |
| | MODEL CS-42 | MODEL CS-54 |
| Maximum Roll: | 42" Long X 23" Diameter | 54" Long X 23" Diameter |
| Power: | 5 HP, 208/220/440 Volt, 3 Phase | 5 HP, 208/220/440 Volt, 3 Phase |
| Controls: | 24 Volt DC, Dual Palm Buttons | 24 Volt DC, Dual Palm Buttons |
| Cycle Time: | 9.54 Seconds (Dry) | 9.54 Seconds (Dry) |
| Oil Reservoir: | 10 Gallons | 10 Gallons |
| | MODEL CS-66 | |
| Maximum Roll: | 66" Long X 23" Diameter | |
| Power: | 5 HP 208/220/440 Volt, 3 Phase | |
| Controls: | 24 Volt DC, Dual Palm Buttons | |
| Cycle Time: | 9.54 Seconds (Dry) | |
| Oil Reservoir: | 10 Gallons | |

**Note: 10 Gallons AW46 Hydraulic Oil is NOT Included
Machines are designed for 3" I.D. Minimum Cores




MODEL CS-66 (Shown with Optional Spare Blade and Blade Carrier)

- Available in Sizes for Stripping Up to 66” Long X 23” Diameter Cores
- Hydraulically Powered “Shear-Action” Blade
- Cut Material Falls Directly into Container Below
- Dual Palm Button Operation Features Anti-Repeat Interlock
- Optional Blade Carrier Attachment Helps You Safely Replace Dull Blades
 - Available on Models CS-42, CS-54, and CS-66
- Easy Loading, Swing Out Mandrel with Electrical Interlock Keeps Hands Away from Blade at All Times
 - Standard on Model CS-42, CS-54, and CS-66
- Easy Loading, Flip Up Cover with Electrical Interlock Keeps Hands Away from Blade During Cycle
 - Standard on Model CS-18, and CS-32
- Jack Screw Makes Cut Depth Adjustments Easy and Fast, without Resetting Limit Switches
- Warning Buzzer at Start Up and Cycle Initiation
- Frames are Stress Relieved, Sand Blasted, and Primed Before Powder Coated
- Durable Powder Coated Finish (Standard Colors Red and Safety Yellow)
- Machined Parts are Black Annealed to Reduce Rust and Corrosion

We Recommend One Spare Blade be Purchased with Each Machine Ordered to Eliminate Down Time while Sharpening the Blade.

Blades are Manufactured from Hardened Modified High-Carbon, High-Chromium Tool Steel.

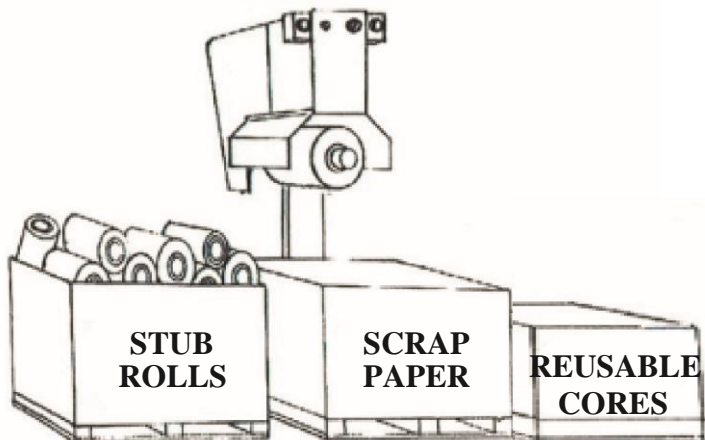

DON'T WASTE IT, STRIP IT, WITH CORESTRIPPER.COM

Ph: (267) 272-5089 • Sales@corestripper.com • www.corestripper.com